



## Multimode beam splitter 1 to 4

### Pre-Terminated Patch Panel


- Standard 19" width
- Max 144 fibers in 1U
- Ultra-High Density Ready

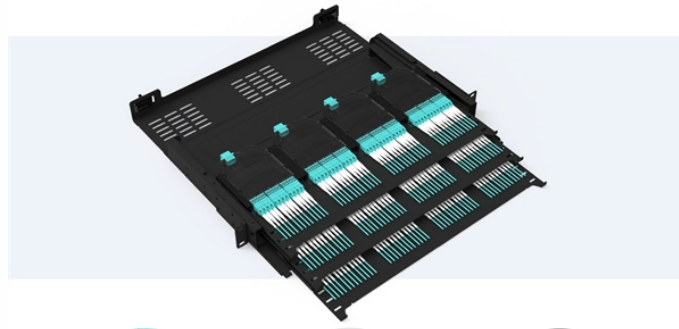

Dual-rail, easy install & maintain



Lightweight ABS MPO cassette



Premium sheet metal with matte coating



## Multimode beam splitter 1 to 4




Beam Splitters – Buying Guide & Suppliers Use this beam splitters buying guide to compare major types, define selection criteria, and find suppliers:  
 Technical background information – buyer ...



Castor's Multimode Fiber Splitters (MFS) are designed to efficiently split or combine multimode signals with minimal insertion loss. Manufactured with step-index fibers with core diameter ranging from 50 ...



Please download the Multi-Mode 1x4 fiber Splitter PDF [here](#).



The paper presents the design, simulation, optimization, and fabrication of a 3D optical splitter utilizing multimode interference with four S-Bend outputs.




Thorlabs offers a varied selection of single mode (SM), polarization-maintaining (PM), multimode (MM), and double-clad fiber couplers, as well as 1x8 and 1x16 SM PLC splitters; 1x4, 1x8, and 1x16 PM ...



Deploying compact FS PLC Splitters to simplify your networks, perfectly fits your PON, EPON, FTTX, etc.



AFW Technologies Multimode 1x2 couplers are bidirectional and can be used as couplers or splitters. The MM graded index couplers offer low insertion loss and excellent environmental and mechanical ...



The NanoSpeed™ Series 1x4 solid-state fiber-optic splitter splits the optical power among four outputs with any power splitting ratio. The input is polarization-maintaining (PM) fiber and the outputs are four ...



Both 1XN and 2XN splitters can be constructed in this fashion with as many as eight or more outputs, with both low return losses and low insertion losses. This design is extremely flexible, allowing one to ...



Our Multimode Fiber Optic Couplers come standard with 62.5/125  $\mu\text{m}$  fiber, with low insertion loss and a broad operating wavelength range from 800 to 1600 nm. The 1x2 and 2x2 couplers are offered in ...

## Contact Us

For more information, pricing, or custom solutions, please contact us:

Website: <https://www.indzawo.co.za>

Email: [sales@indzawo.co.za](mailto:sales@indzawo.co.za)

Phone: +27 71 296 8473

Address: 22 Quantum Street, Midrand, 1685, Gauteng, South Africa

This document is for informational purposes only. Specifications subject to change without notice.

